

FLTX4L/5L/7L - FLTZ5S/6S/7S

Datasheet



LiFePO₄
NON-SPILLABLE



The new Lithium range is designed to offer the ultimate riding experience.

Ready to use and with ultra-light weight conception, this LiFePO₄ range will ensure extreme starting performance, very low self-discharge and extreme cycle life. Thanks to the Battery Management System integrated, these batteries offer a very safe solution, ideal for the most demanding riders.

FEATURES

- Ready to use & Maintenance Free
- Ultra lightweight compare to lead acid battery
- Very high cold cranking performance
- Ultra safe thanks to the integrated BMS
- Very fast recharge
- Multi-positional fitment
- Very low self-discharge

BATTERY REPLACEMENT

- FB4L-B
- FTZ7S
- FTX4L-BS/FTZ5S
- FTZ7V
- FTX5L-BS/FTZ6S
- FTZ8V
- FTX7L-BS

TERMINAL

Front



Side



Top



3D



SPECIFICATIONS


Voltage	Capacity	CCA (EN)
12.8V	2.0Ah	120A
Energy	Charging current std.	Charging current max
25.6Wh	1.0A	2.0A

BMS FUNCTION:

- Over discharge protection
- Over charge protection
- Cell equalization

DIMENSIONS & WEIGHT

Length	107±2mm
Width	56±2mm
Total Height	85±2mm
Gross weight	0.50kg

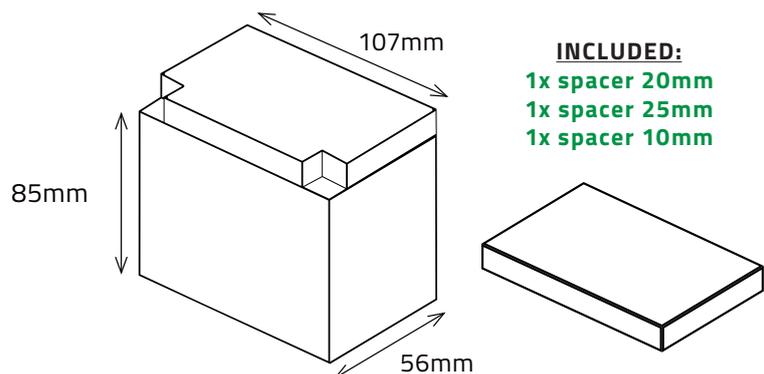

POLARITY



MOUNTING ANGLES



APPLICATIONS



Motorcycle



Scooter



ATV



SSV & UTV



Snowmobile



Watercraft